



Where **high performance**
is the **standard**®

TuffCut® X-AL

Series 137TWF



5 Flute End Mill

Aluminium Thin Wall Finisher



www.mafordeurope.com

TuffCut® X-AL Series 137TWF

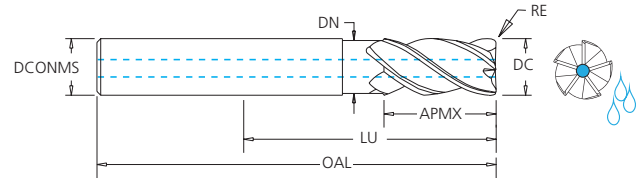

Tool No.	DC	DCONMS	OAL	APMX	LU	DN	RE
137TWF 0604-ALCC	6.0	6.0	64.0	24.0	30.0	5.8	-
137TWF 0804-ALCC	8.0	8.0	80.0	32.0	40.0	7.8	-
137TWF 0804-2.0RALCC	8.0	8.0	80.0	32.0	40.0	7.8	2.0
137TWF 1004-ALCC	10.0	10.0	95.0	40.0	50.0	9.8	-
137TWF 1004-3.0RALCC	10.0	10.0	95.0	40.0	50.0	9.8	3.0
137TWF 1204-ALCC	12.0	12.0	108.0	48.0	54.0	11.6	-
137TWF 1204-3.0RALCC	12.0	12.0	108.0	48.0	54.0	11.6	3.0
137TWF 1604-ALCC	16.0	16.0	125.0	64.0	70.0	15.6	-
137TWF 1604-3.0RALCC	16.0	16.0	125.0	64.0	70.0	15.6	3.0
137TWF 1604-4.0RALCC	16.0	16.0	125.0	64.0	70.0	15.6	4.0

TuffCut® X-AL Series 137TWF - Profile Milling with 4xD APMX

Recommended Cutting Data | Conditions de coupe recommandées | Empfohlene Schnittdaten | Dati di taglio Raccomandati | Zalecane Parametry

Workpiece Material Group	ISO	Coolant			RWOC (Ae)	End Mill Diameter (mm)								
		Emulsion	Air	MQL		6	8	10	12	16				
						Finishing	5%	10%		Multiply fz by this factor based on ae. When finishing, use the standard fz per chart below. Only add chip thinning when roughing or semi-finishing.				
						N/A	2.3	1.67						
						Vc - M/Min								
Aluminium (≤ 10 Si)	N	●	○	●	300 - 2000	0.030	0.040	0.050	0.060	0.080				
Aluminium (> 10 Si)		●	○	●	250 - 1000	0.030	0.040	0.050	0.060	0.080				
Aluminium Lithium		●	○	●	300 - 1500	0.030	0.040	0.050	0.060	0.080				

• Preferred ○ Possible x Not Possible

Notes

- Cutting data provided should be considered advisory only. Adjustments may be necessary depending on the application, workpiece rigidity.
- The 137TWF should only be used in accurate tool holders with adequate gripping power. ER collet type holders are not recommended.
- When finishing at full feed rate into corners, care should be taken to ensure that the stock allowance is consistent, and the feature radius is at least 0.5mm larger than the tool radius to avoid over-engagement.
- Recommended stock allowance for finishing is 0.1 to 0.2mm
- This tool can also be used for light roughing, semi-finishing, and corner reduction operations. For these applications, please use the chip correction factor in the table shown below.

RWOC (ae)	Chip Thickness Compensation Factor
1%	5.00
2%	3.57
3%	2.93
5%	2.30
7%	1.96
8%	1.84
10%	1.67

During profile milling with a radial width of less than 50% of the cutter diameter, the actual chip thickness at the cutting edge is less than the programmed feed per tooth (fz). The accompanying table shows the increase in fz by given radial width percentage to adjust for chip thinning. Multiply your recommended fz by the appropriate feed factor to establish the correct feed rate.





Where **high performance**
is the **standard**



TuffCut® Endmills

Cyclone Drills

TrueSize® Reamers

Twister® Drills

Chamfer & Profile Mills

Diamond Grind Routers

Edgehog® Burrs

Countersinks

M.A. Ford Europe Ltd.

650 City Gate
London Road, Derby
DE24 8WY
United Kingdom

Tel: +44(0) 1332 267960
Fax: +44(0) 1332 267969
Email: sales@mafordeurope.com
www.mafordeurope.com

M.A. Ford® Mfg. Co., Inc.

7737 Northwest Blvd.
Davenport,
IA 52806
USA

Tel: 563-391-6220 or 800-553-8024
Fax: 563-386-7660 or 800-892-9522
Email: sales@maford.com
www.maford.com

M.A. Ford® Asia-Pacific Limited

Room 1709, Level 17
Millennium City 2
378 Kwun Tong Road
Kowloon, Hong Kong

Tel: +852-2167-7150
Fax: +852-2167-8150
Email: sales@mafordap.com



www.mafordeurope.com



Tel: +44 (0) 1332 267960



Email: sales@mafordeurope.com

FLY-137TWFE-EN-01